POWER YOUR FUTURE Cummins Generator LG84C

6BT5.9-G2-96KW

Prime Power: 84KW/105KVA Standby Power: 92.4KW/115.5KVA

Cummins Series 25KVA--2000KVA



GENERATING POWER SOLUTIONS

Increased availability for new operations Reliable, robust and versatile generator. Ready to deliver power for a next job.

Increased uptime during operations Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

Reduced transport and installation costs

The compact and robust design with integrated transport features enables faster and safer

transport and installation.

Reduced service & maintenance costs

Longer service intervals. Quicker and more efficient service jobs.

Premium resale value

Designed and built to last.



Operate safely in accordance with proper operation manual.
To prevent trouble and accidents, perform daily and preventive maintenance checks without fail.

FUAN LONGKAI POWER CO., LTD.

Headquarters:

Add: Wei 5 Road, Tiehu Industrial Zone, Fuan, Fujian,China Tel:+86-0593-6309773 Fax:+86-0593-6586988 E-mail: sales@longkaipower.com Web: www.longkaipower.com



Technical Data

Model		LG84C
Rated prime power	kva	105
Rated standard power	kva	115.5
Rated voltage line to line	V	400/230
Rated current	А	152
Maximun sound level	dB(@7m)	96

Engine-DCEC Cummins

Model	6BT5.9-G2-96KW	
Aspiration	turbo charger	
Fuel system	Beiyou PB pump /GAC	
No. cylinders	6 in line	
Displacement	Liquid	5.9
Bore*Stroke	mm	102*120
Compression ratio		17.3: 1
Rated speed	r/min	1500
Rated net power(with fan)	Kw	96
Governor type	Electronic speed	
Start Motor	V	24

Exhause System		
Exhause gas flow	m³/min	250
Exhause gas temp	°C	526
Max back pressure	kPa	10

Aspiration System		
Max inlet pressure	kPa	99
Combustion volume	m³/min	/
Air flow	m³/min	100

Fuel System		
100% load(Prime power)	L/h	22
75% load(Prime power)	L/h	17
50% load(Prime power)	L/h	11
Fuel tank capacity	L	340

Lubrication System		
Oil capacity	L	16.4
Oil consumption	g/kwh	0.5
Oil pressure	kPa	207-345
(continuous operation)		

Cooling SystemCoolant capacityL9.9Thermostat operation range°C83-95Max water temperature°C104

Alternator		
Model	LONGKAI	LK274D
	STAMFORD	UCI274D
Phase		3
Voltage	V	400/230
Wiring Type	3 Phase 4 wire, Y type	
Bearing		1
Power factor		0.8
Frequency	Hz	50
Prime power	KW	96
Exciter Type	Brushless, self-excitati	
Voltage regulation	%	±0.5
Protection Grade		IP 23
Insulation grade		H/H
Altitude	m	≤1000
Controller-DEEPSEA		
Model		DSE6120MK3
Protective functions:		
Low oil pressure		
High water temperature		
High/low voltage		
High Engine Temperature and Overspeed.		
Voltage regulator frequency regulator		
Emergency stop		
Start failure		



Control Module Options



Auto generator control module

- Control module with" Three Remote Control" functions
- ATS auto load transfer screen
- Synchronising control modules
- Power output cabinet

LG84C



Standard Features

Engine(DCEC Cummins)
Radiator 50°C max,fans are driven by bel
24V charge alternator
Alternator: single bearing alternator IP23,
insulation class H/H
Standard auto control system
One set of air filter, fuel filter, oil filter
Main line circuit breaker/MCCB
Base fuel tank
Two 24V batteries, rac and cable
Exhaust system(Ripple flex exhaust pipe,
exhaust siphon, flange, muffler
User manual

Options

Battery charge		0
Engine heater		0
Alternator heater		0
PMG		0
Water oil separator		0
Daily fuel tank		0
Remote control panel		0
Automatic transfer switch/A	TS	0
Switch box		0
Standard: •	Options: o	

Warranty*


Cummins Engine


12 months from date of purchase and 1000 hours.


Generator

12 months from date of purchase or 1000 hours (whichever occurs first).

Unit Dimensions(Basic unit)

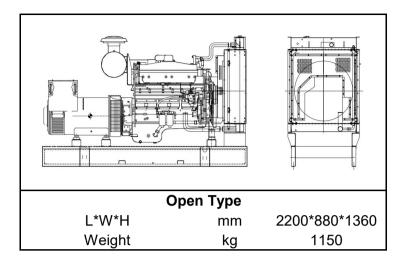

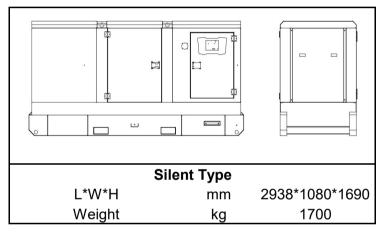

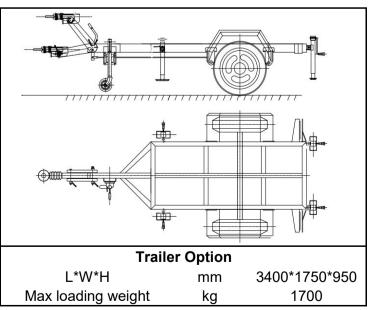



More information, pls refer to our web-site: www.longkaipower.com

Manufacturer reserves the right to make changes in model, technical specification, color, equipment and accessories without notice.